


### Features:






- 1600 nits Sunlight Readable LCD
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- Picture in Picture Function
- Advanced Optical Bonding (AOT)
- High Shock & Vibration Resistance
- Projected Capacitive Multi-Touch Support
- IP 65 Facial Waterproof
- Isolation Power 9-36V DC Input



### Specifications

Description	19" IP 65 Sunlight Readable Multi-Touch Marine Display
<b>Backlight</b>	LED Backlight
<b>Active Display Area</b>	376.3 x 301.1 mm
<b>Brightness</b>	1600 cd/m <sup>2</sup>
<b>Resolution</b>	1280 x 1024 (SXGA)
<b>Contrast Ratio</b>	1000:1
<b>Pixel Pitch (mm)</b>	0.294 (H) x 0.294 (V)
<b>Viewing Angle</b>	170 (H), 160 (V)
<b>Display Color</b>	16.7M
<b>Response Time</b>	5ms
<b>Inputs</b>	VGA x2, DVI x2, Compositex3, RS232 x1, USB x1
<b>PIP Support</b>	3 Stages (child, split & wide screen)
<b>Mechanical</b>	
<b>IP Rating</b>	Facial waterproof to IP 65 standards when console mounted
<b>Construction</b>	Rugged Aluminum Alloy Chassis
<b>Mounting</b>	Panel (Flush) mount, VESA mount
<b>Dimension</b>	463(W) x 411.1(H) x 56.9(D)
<b>Net Weight</b>	5.5 Kg
<b>Power</b>	
<b>Voltage</b>	DC Input Voltage: DC 9~36V
<b>Power Consumption</b>	42W
<b>Environmental</b>	
<b>Operating Temperature</b>	-10°C~50°C
<b>Non-Operating Temperature</b>	-20°C~70°C
<b>Certification</b>	Designed to meet CE / FCC Class A
<b>Marine Type Approval</b>	Designed to meet CE / FCC & BV Marine Approval Pending

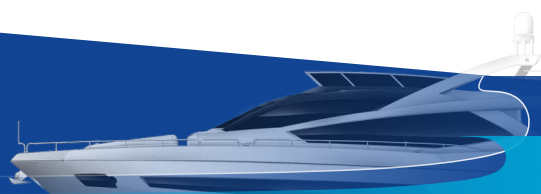

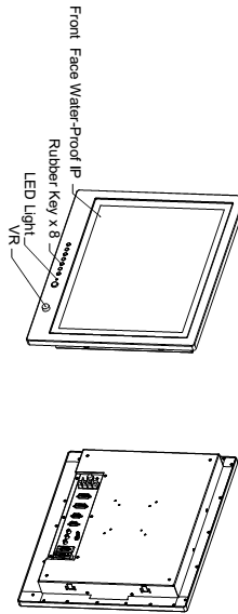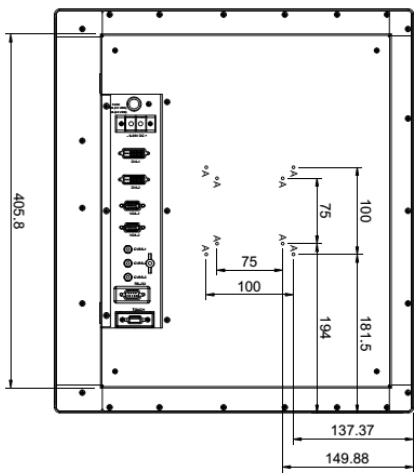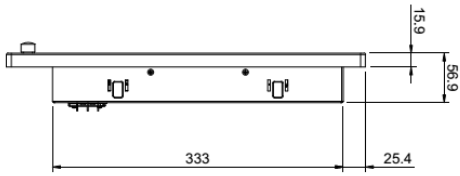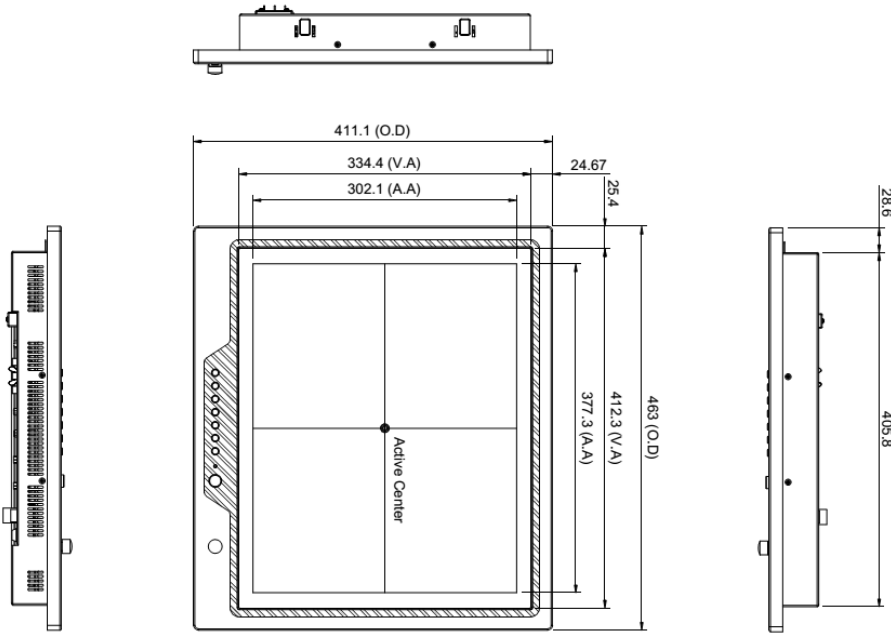

Back View

