
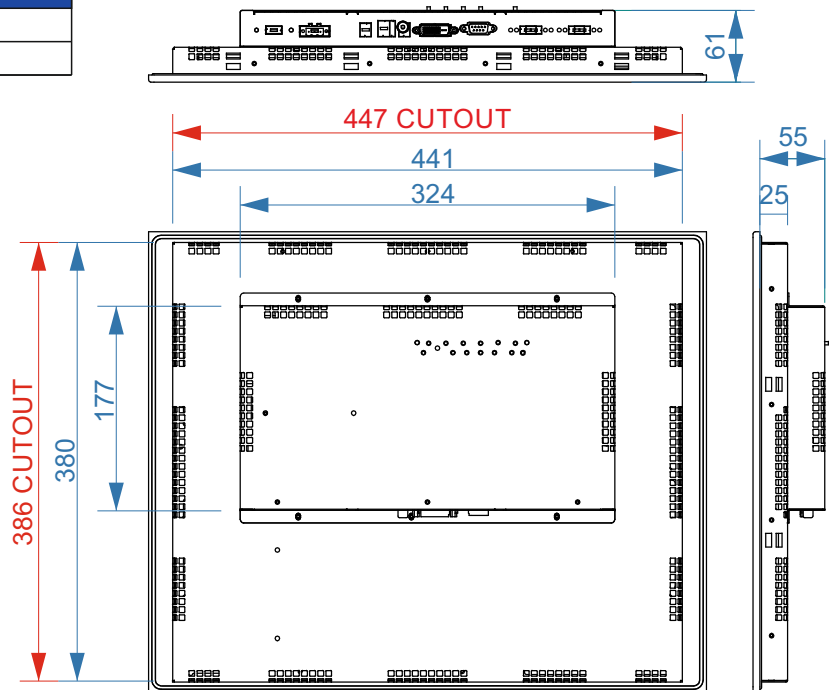


I/O Port		Power	
VGA	1	Power Input	9~36V DC
DVI	1	Power Consumption	Max 30 W
DP	1	Mechanical	
Touch Screen	USB	Construction	Aluminum Front Panel, INOX 316
Others	-	IP rating	IP 66 Front Panel
OSD Control	-	Mounting	Panel Mounting
Power	4 pin DC Terminal Block 2 pin remote power switch	Dimension (mm)	483 x 399 x 61
		Net weight (Kg)	-
Display		Environment	
Display type	19" TFT-LCD 4:3	Operating Temperature	0~50°C
Max. resolution	1280 x 1024	Storage Temperature	-30~70°C
Max. color	16.7 M	Certification	CE
Luminance(cd/m ²)	300	Ordering Information	
View angle(H°/V°)	85/85/80/80°	HS-3840	M. Slim 19" Projected Capacitive
Contrast	500:1		
Touch Screen			
Type	Capacitive		
Interface	USB		

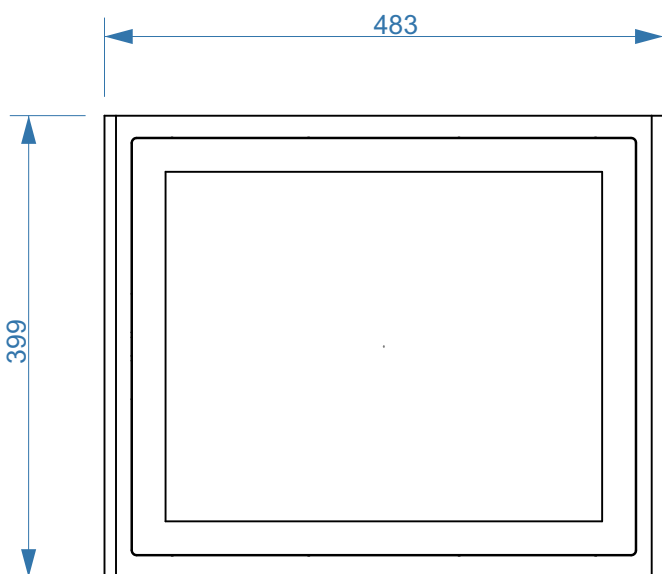

6H