




HSB

Model Name	HSB-205
System	
CPU	Intel® 7th Gen. Core & 6th Gen. Core™/Pentium™/Celeron™ (LGA1151) Processors
Chipset	Intel® H110
Socket	LGA1151
BIOS	AMI EFI 128 Mbit SPI
Expansion Slot	
M.2	1x M.2 2242 (B key for SSD)
Mini-PCIe	1x F/S Mini-PCIe slot support mSATA
PCIe x16 (Gen2/3)	1x (16GB/s per direction)
Memory	
Technology	Dual Channel DDR4 2400/2133MHz SDRAM (non-ECC)
Max.	up to 32GB (16GB per SO-DIMM)
Socket	2x 260pin SO-DIMM
Storage	
SATA	2x SATA 3.0 (600MB/s per port)
Graphics	
Controller	Intel HD Graphics 530
VRAM	Shared system memory, 2GB and above, total system memory shared 1GB max. video memory
VGA / DVI-D	Max. resolution 1920 x 1200 @ 60Hz
DP	Max. resolution 4096 x 2160 @ 60Hz
LVDS / eDP	LVDS: supports dual channel 24bit up to 1920 x 1200 / eDP: with internal pin header, supports max. resolution 4096 x 2160 @ 60Hz
Dual Display	Yes (DP + VGA, DP + LVDS (or eDP), DP + DVI-D, DVI-D + VGA, DVI-D + LVDS (or eDP), VGA + LVDS (or eDP))
Ethernet	
Interface	10/100/1000 Mbps
Controller	2x RJ45 GbE LAN (Realtek RTL8111G)
I/O	
Interface	1x VGA, 1x DVI-D, 1x DP++, 4x ETH LAN (+4 optional), 4x USB 3.0, 8x USB 2.0, 3x Audio (Mic-in / Line-in / Line-out)
Power	
Power Input	220V AC
Power Consumption	65/35W
Mechanical	
Construction	Silver steel case
Mounting	Wall mounting
Dimension (mm)	244.9 x 88.2 x 223.3
Weight (Kg)	3
Environment	
Operating Temperature	0°C ~ 50°C
Storage Temperature	-20°C ~ 70°C
O. S. Support	
Windows®	Windows® 7 / 8.1 / 10

HSB-205

Box PC Wall Mount

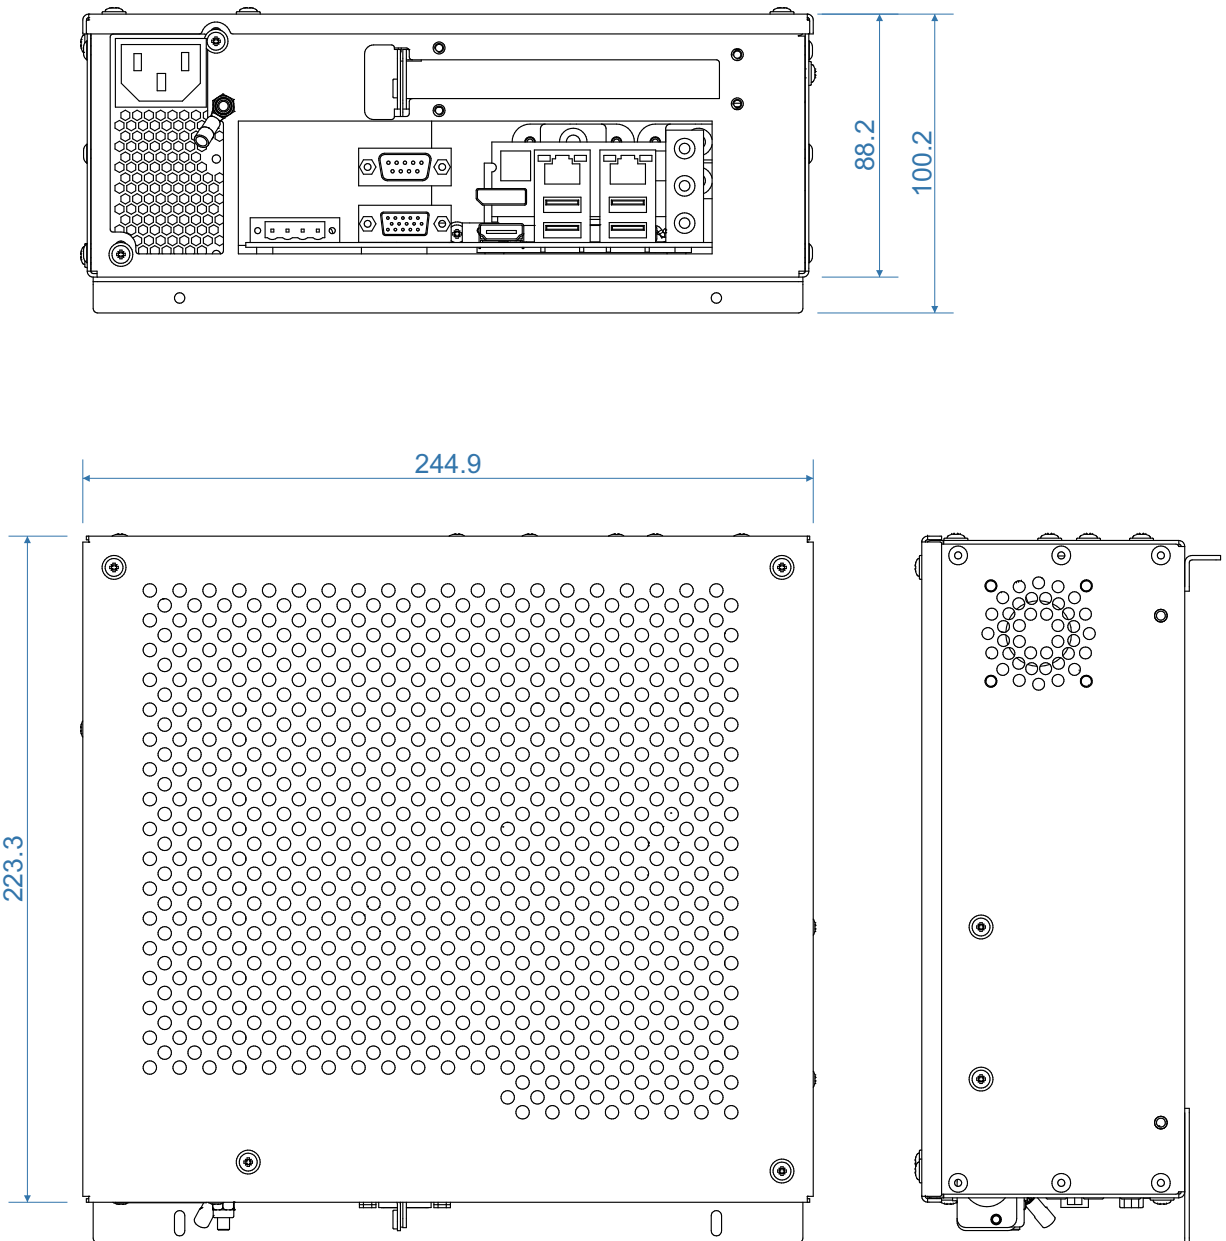

HSB-205 | BOX PC WALL MOUNT