






NANOBOX-N97



FANLESS BOX PC

MECHANICAL & ENVIRONMENTAL	
MOUNTING KIT	Wall Mount
DIMENSIONS	205 x 125 x 70.5 mm
WEIGHT	2.5/3 kg
CERTIFICATE INFORMATION	
CERTIFICATIONS	CE
OPERATING TEMPERATURE	0°C ~ 50°C
STORAGE TEMPERATURE	-40°C ~ 80°C
OPERATING HUMIDITY	40°C @ 95% Relative Humidity, non condensing
IP RATING	IP20
ORDERING	
NANOBOX	HS-(TBD)
NOTES	
RAM AND STORAGE CAPACITY MUST BE SPECIFIED IN THE INQUIRY	

MODEL	NANOBOX-215U
SYSTEM INFORMATION	
PROCESSOR	Intel® Alder Lake N97 4 Cores, 6MB Cache, 12W, up to 3.60GHz
SYSTEM MEMORY	1x DDR4 SO-DIMM Dual Channel
MAX. MEMORY	Max. up to 32GB
GRAPHICS	Integrated Intel® UHD Graphics
BIOS	AMI UEFI BIOS
SOFTWARE SUPPORT	
OS INFORMATION	Windows® 10 / Windows® 11 Linux®
STORAGE	
mSATA	1x mSATA for SSD/4G Module
SATA	1x SATA3.0 for 2.5-inch HSS
EXPANSION	
M.2	1x M.2_E for Wi-Fi, support Intel® Integrated Connectivity (CNVi)
I/O	
SERIAL PORT	6x COM: default 4x RS232 + 2x Rs485 (Optional 6x RS232)
USB PORT	4x USB 3.2, 4x USB 2.0
VIDEO	1x HDMI 2.0, 1x DP
AUDIO	1x Audio Line-Out Realtek HD (1x CTIA 2-in-1 Audio Jack)
LED	Power Indicator
GPIO	8-bit 4x GPI + 4x GPO
BUTTONS	1x ON/OFF Power Button
WIRED CONTROL	1
ETHERNET	
LAN CHIPSET	2x Intel® i210
ETHERNET INTERFACE	10/100/1000 Mbps
LAN PORT	2x RJ45
POWER REQUIREMENT	
DC INPUT	9 ~ 35V DC
PERIPHERAL INPUT	For Fan and SATA

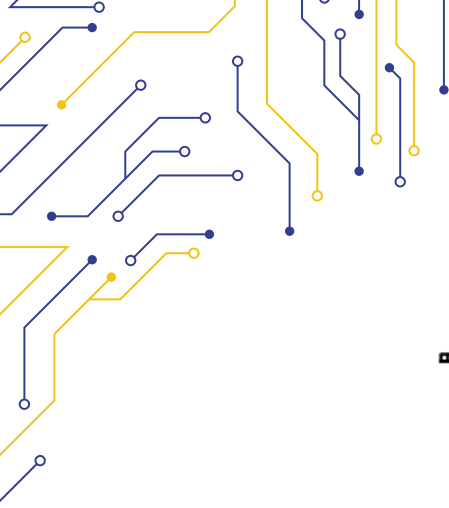

NANOBOX-N97

