


Features:



- 1000 nits Sunlight Readable LCD
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- Advanced Optical Bonding (AOT)
- High Shock & Vibration Resistance
- Resistive Touch Support
- IP 65 Facial Waterproof
- 9-36V DC Input





Specifications

Description	15" IP 65 Sunlight Readable Marine Display
Backlight	LED Backlight
Active Display Area	304.128 x 228.096 mm
Brightness	1000 cd/m ²
Resolution	1024 x 768 (XGA)
Contrast Ratio	700:1
Pixel Pitch (mm)	0.297(H) x 0.297 (V)
Viewing Angle	160 (H), 160 (V)
Display Color	16.2M
Response Time	25ms
Inputs	VGA x1, DVI x1, Compositex3, RS232 x1, USB x1
PIP Support	NA
Mechanical	
IP Rating	Facial waterproof to IP 65 standards when console mounted
Construction	Rugged Aluminum Alloy Chassis
Mounting	Panel (Flush) mount, VESA mount
Dimension	352.8(W) x 303.3(H) x 56.4(D)
Net Weight	3.5 Kg
Power	
Voltage	DC Input Voltage: DC 9~36V
Power Consumption	40.8W
Environmental	
Operating Temperature	-20°C~60°C
Non-Operating Temperature	-20°C~70°C
Certification	CE / FCC
Marine Type Approval	BV Rule IACES-E10 certification, comply with IEC 60945

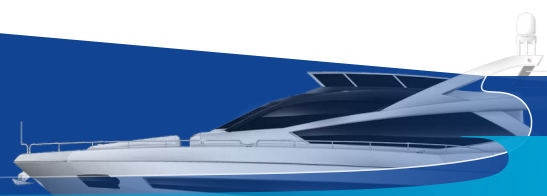


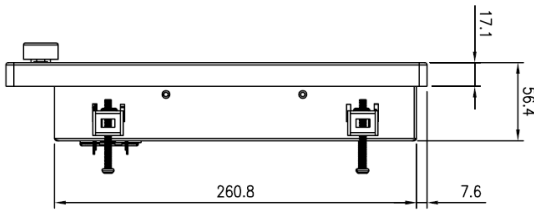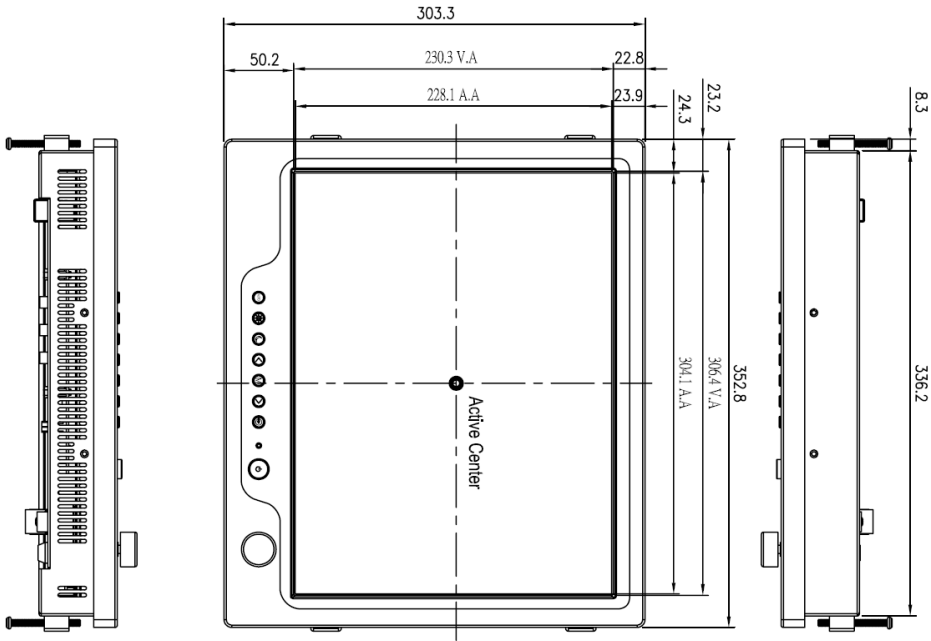

Side View

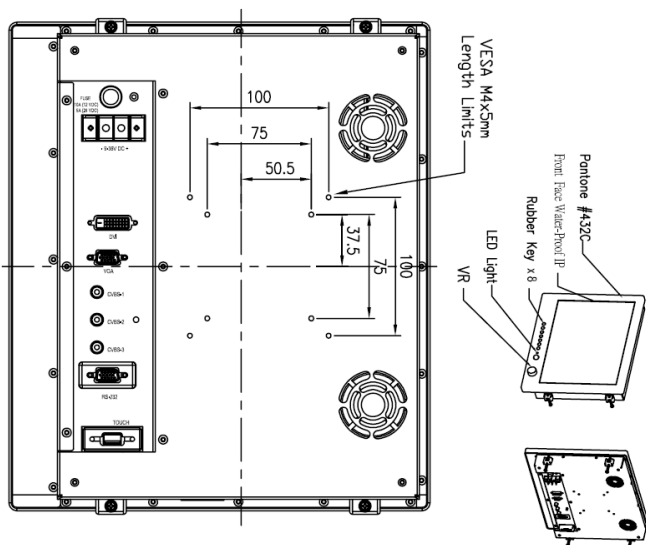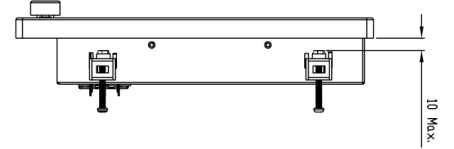

Back View

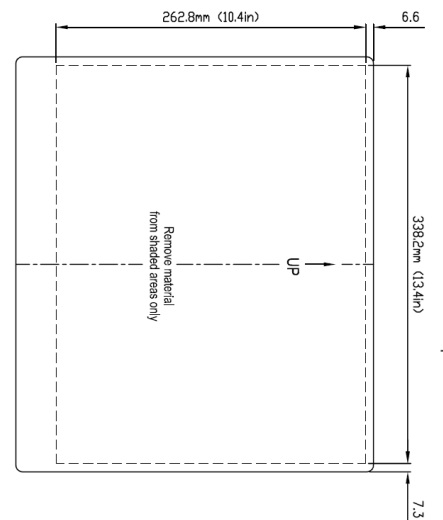

NPD1555 Flush Mount Template

