


Features:



- 1600 nits Sunlight Readable LCD
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- Advanced Optical Bonding (AOT)
- High Shock & Vibration Resistance
- Projected Capacitive Multi-Touch Support
- IP 65 Facial Waterproof
- Isolation Power 9-36V DC Input 9-36V DC Input





Specifications

| Description | 15" IP 65 Sunlight Readable Marine Display |
|----------------------------------|---|
| Backlight | LED Backlight |
| Active Display Area | 304.13 x 228.1 mm |
| Brightness | 1600 cd/m ² |
| Resolution | 1024 x 768 (XGA) |
| Contrast Ratio | 700:1 |
| Pixel Pitch (mm) | 0.297 (H) x 0.297 (V) |
| Viewing Angle | 160 (H), 160 (V) |
| Display Color | 16.7M |
| Response Time | 8ms |
| Inputs | VGA x1, DVI x1, Compositex3, RS232 x1, USB x1 |
| PIP Support | NA |
| Mechanical | |
| IP Rating | Facial waterproof to IP 65 standards when console mounted |
| Construction | Rugged Aluminum Alloy Chassis |
| Mounting | Panel (Flush) mount, VESA mount |
| Dimension | 389.4(W) x 331(H) x 57.1(D) |
| Net Weight | 4.1 Kg |
| Power | |
| Voltage | DC Input Voltage: DC 9~36V |
| Power Consumption | 23W |
| Environmental | |
| Operating Temperature | -20°C~60°C |
| Non-Operating Temperature | -20°C~70°C |
| Certification | Designed to meet CE / FCC Class A |
| Marine Type Approval | Designed to meet CE / FCC & Marine Approval Pending |

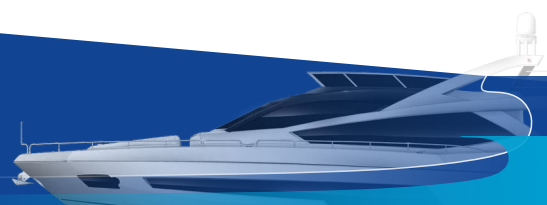

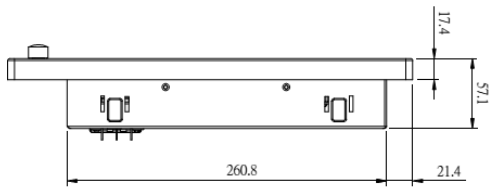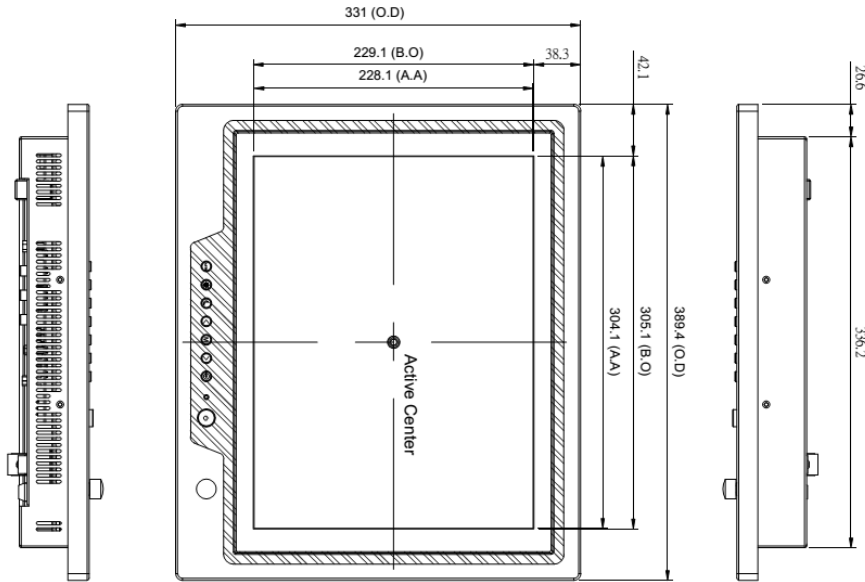

Side View

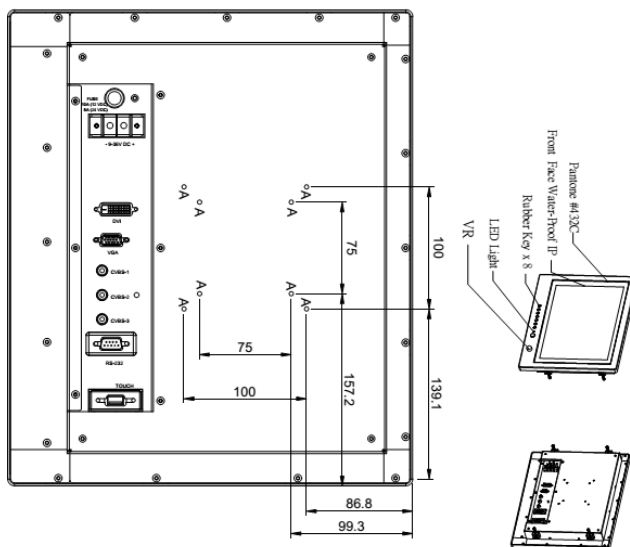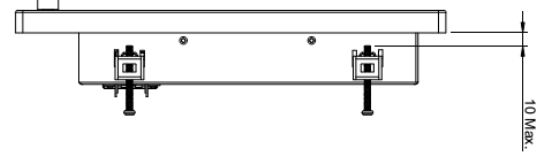

Back View

