


Features:



- 1000 nits Sunlight Readable LCD
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- Picture in Picture Function
- Advanced Optical Bonding (AOT)
- High Shock & Vibration Resistance
- Resistive Touch Support
- IP 65 Facial Waterproof
- 9-36V DC Input





Specifications

Description	19" IP 65 Sunlight Readable Marine Display
Backlight	LED Backlight
Active Display Area	376.32 x 301.06 mm
Brightness	1000 cd/m ²
Resolution	1280 x 1024 (SXGA)
Contrast Ratio	1000:1
Pixel Pitch (mm)	0.294 (H) x 0.294 (V)
Viewing Angle	170 (H), 160 (V)
Display Color	16.7M
Response Time	5ms
Inputs	VGA x2, DVI x2, Compositex3, RS232 x1, USB x1
PIP Support	3 Stages (child, split & wide screen)
Mechanical	
IP Rating	Facial waterproof to IP 65 standards when console mounted
Construction	Rugged Aluminum Alloy Chassis
Mounting	Panel (Flush) mount, VESA mount
Dimension	421.9(W) x 375.5(H) x 56.8(D)
Net Weight	5.5 Kg
Power	
Voltage	DC Input Voltage: DC 9~36V
Power Consumption	55W
Environmental	
Operating Temperature	-10°C~50°C
Non-Operating Temperature	-20°C~70°C
Certification	CE / FCC
Marine Type Approval	BV Rule IACES-E10 Certification, comply with IEC 60945

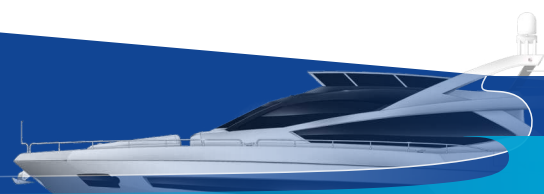

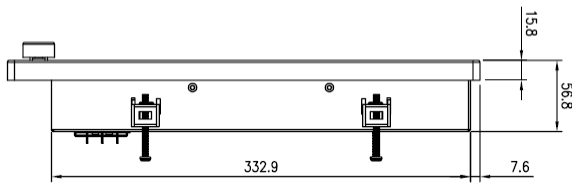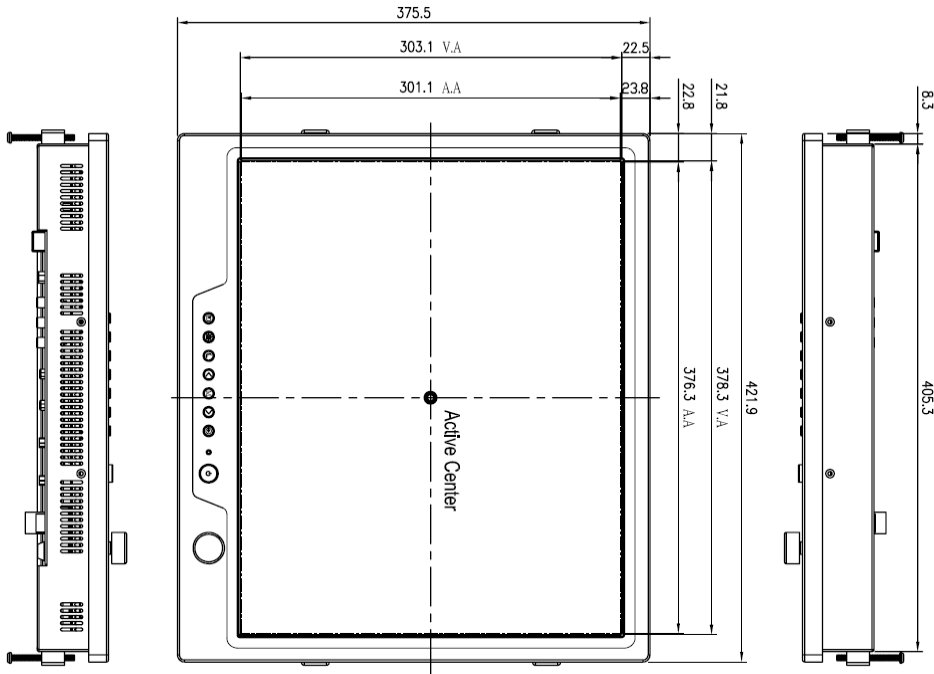

Side View

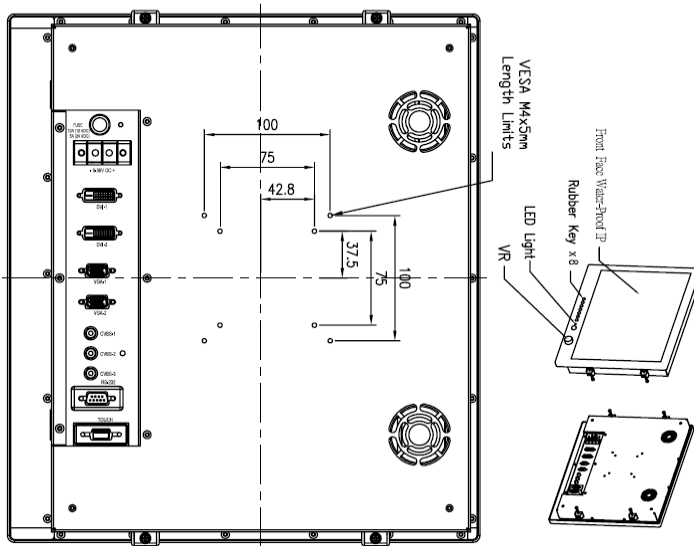

Back View

