


Features:

- 1600 nits Sunlight Readable LCD
- Long Life, Low Power Consumption LED Backlight
- Wide Operating Temperature
- Picture in Picture Function
- Advanced Optical Bonding (AOT)
- High Shock & Vibration Resistance
- IP 65 Facial Waterproof
- Isolation Power 9-36V DC Input






Specifications

Description	21.5" IP 65 Sunlight Readable Marine Display
Backlight	LED Backlight
Active Display Area	477.7 x 269.1 mm
Brightness	1600 cd/m ²
Resolution	1920 x 1080 (FHD)
Contrast Ratio	1100:1
Pixel Pitch (mm)	0.248 (H) x 0.248 (V)
Viewing Angle	170 (H), 160 (V)
Display Color	16.7M
Response Time	5ms
Inputs	VGA x2, DVI x2, Compositex3, RS232 x1, USB x1
PIP Support	3 Stages (child, split & wide screen)
Mechanical	
IP Rating	Facial waterproof to IP 65 standards when console mounted
Construction	Rugged Aluminum Alloy Chassis
Mounting	Panel (Flush) mount, VESA mount
Dimension	557.6(W) x 383.2(H) x 56.9(D)
Net Weight	6 Kg
Power	
Voltage	DC Input Voltage: DC 9~36V
Power Consumption	47W
Environmental	
Operating Temperature	-10°C~50°C
Non-Operating Temperature	-20°C~70°C
Certification	Designed to meet CE / FCC Class A
Marine Type Approval	Designed to meet CE / FCC & BV Marine Approval Pending

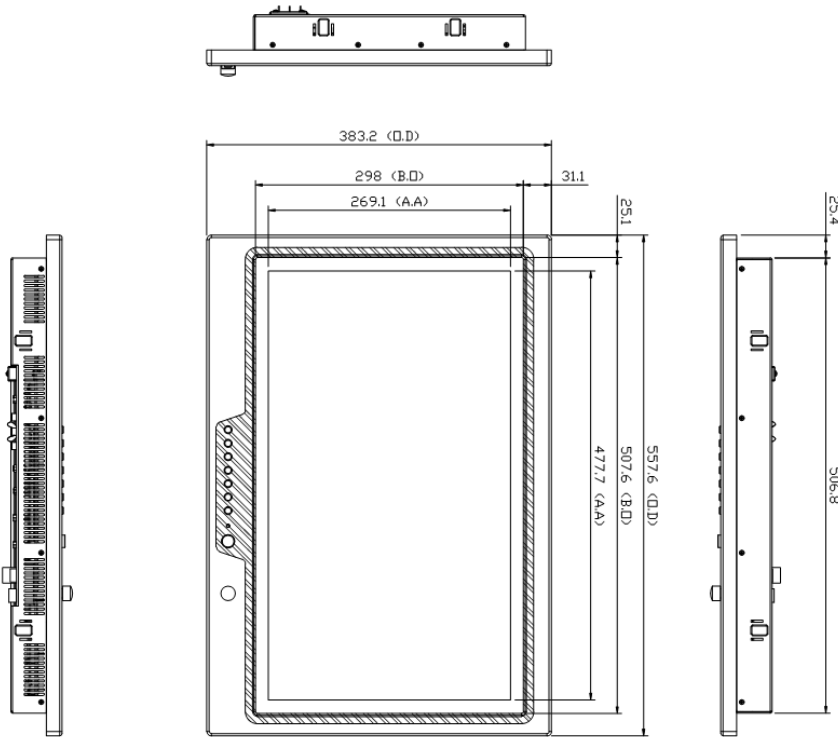

Side View

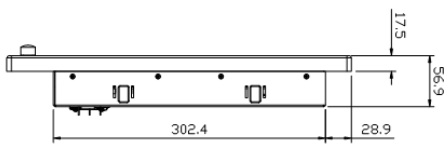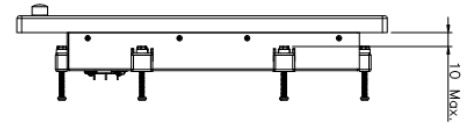

Back View

