

UTC-520

21.5" Ubiquitous Touch Computer with Intel® Core™ i Processor

NEW



Features

- Low-power, fanless system design
- Intel® Core™ i5-8365UE processor
- 21.5" monitor with 16:9 widescreen display
- IP65-rated front panel for water and dust resistance
- All-in-one aluminum extrusion design
- Supports landscape and portrait screen orientations
- VESA (100 x 100) mount holes
- Side groove design for integrating peripherals
- Single-chip watchdog timer with 255 intervals
- Optional custom anti-glare surface
- Optional 400-nit LCD panel



Introduction


UTC-520 is an all-in-one computer with an Intel® Core™ i5-8365UE processor, widescreen LCD touch panel, and side groove design for integrating optional peripherals. Designed for diverse self-service, content broadcasting, and interactive signage applications, UTC-520 systems can be deployed in a wide range of usage scenarios for enhancing customer satisfaction, furthering brand equity, and maximizing business profits.

Specifications

System	CPU	Intel® Core™ i5-8365UE
	Base Frequency	1.60 GHz (quad-core)
	LLC	6MB
	Memory	Dual channel/dual socket DDR4 2400 Mhz, up to 32GB
	HDD	1 x 2.5" internal SATA HDD bay
	Network (LAN)	2 x Gigabit Ethernet (supports Wake-on-LAN) 2 x RS-232 COM (RS-422/485 optional)
	I/O	4 x USB 3.1 2 x Gigabit Ethernet (RJ-45) 1 x HDMI 1 x Audio Line-out 1 x Mic-in
	Stereo Speaker	2 x 3W
	Expansion	1 x M.2 E-key 2230 1 x M.2 B-key 2280 (NVMe PCIe x2), 3042 LTE module (supports USB 2.0 only) (optional M-key 2280 NVMe PCIe x4)
Mechanical	Mount Options	VESA (100 x 100)
	Dimensions (W x H x D)	517.64 x 313.51 x 43.5 mm/20.37 x 12.34 x 1.71 in
	Weight	8 kg/17.6 lb
Board Features	Watchdog Timer	65536 intervals, 0 ~ 65535 sec
	TPM	TPM2.0 (SLB9670XQ2.0)
Operating System		Windows 10 IoT Enterprise Linux Ubuntu 18.04
Environmental	Operating Temperature	0 ~ 40 °C/32 ~ 104 °F
	Relative Humidity	10 ~ 95% @ 40 °C/104 °F, non-condensing
	Vibration	0.5G
	Shock	5G peak acceleration (11 msec)
	EMC/Safety	CE (No RED certification), FCC, UL, CB, CCC, BSMI
	Front Panel Protection	IP65 rated/NEMA4 compliant
Power Supply	Input Rating	12 V, 7 A (84W ITE adapter)
	Power Consumption	Typical 40W Max. 50W
LCD Display	Size/Type	21.5" TFT LCD with LED backlight
	Max. Resolution	1920 x 1080
	Max. Color	16.7M
	Pixel Pitch (H x V)	248.25 x 248.25 μm
	Brightness	250 cd/m ² (400 cd/m ² optional)
Touchscreen (PE/RE/GE)	Viewing Angle	178°/178°
	Type	Projected capacitive (PCAP) touch, anti-glare surface coating available upon request
	Light Transmission	88% ± 2%
	Controller	USB interface

Dimensions

Unit: mm

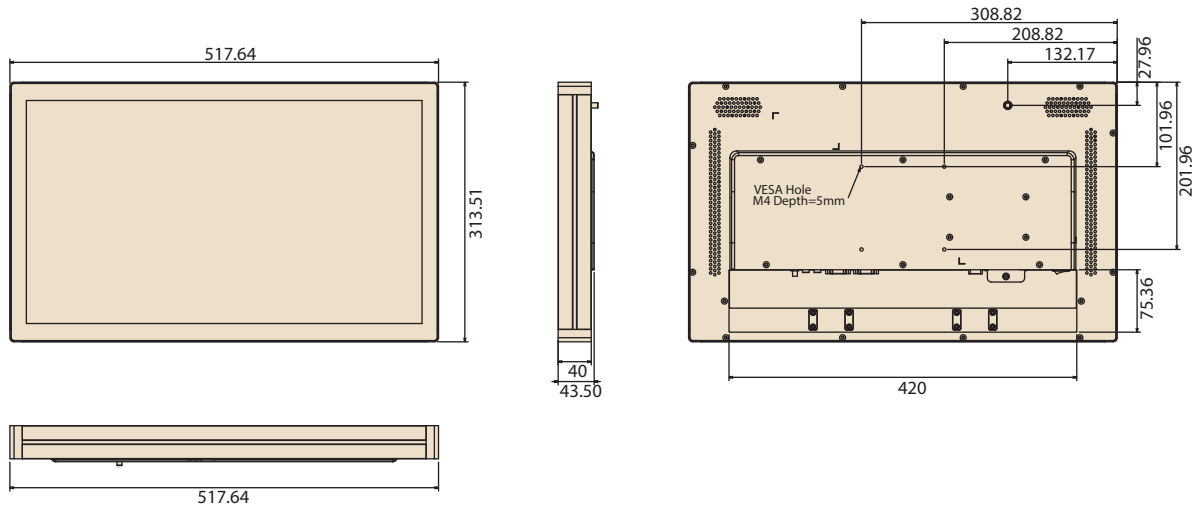

Ordering Information

Part Number	Description
UTC-520HP-ATB0E	21.5" fanless UTC with Intel® Core™ i5-8365U processor, 4GB RAM, and PCAP control and 7H touchscreen
UTC-520H-PE	21.5" fanless UTC with Intel® Core™ i5-8365U processor, 4GB RAM, and PCAP control and 9H touchscreen
UTC-520HR-ATB0E	21.5" fanless UTC with Intel® Core™ i5-8365U processor, 4GB RAM, and resistive control touchscreen
1702002600	Power cable, UL/CSA, 3P, 10A, 125V, 183 cm (USA)
1700000596	Power cable, CCC, 3P, 10A, 250V, 183 cm (China)
1700018704	Power cable, BSI, 2P, 10A, 250V, 180 cm (UK)
1960069544N001	I/O cover for UTC-520 series


Peripherals for UTC-500 Series

Part Number	Description
UTC-P01-A1E	5MP camera module (via USB)
UTC-P02-A0E	Magnet strip reader (via USB)
UTC-P03-A1E	RFID/NFC reader (via USB)
UTC-P06-A2E	Smart card reader (via USB)
UTC-P07-A4E	2D barcode module (Honeywell) (via USB)
UTC-P09-A0E	Fingerprint reader (via USB)
UTC-P21-A2E	4-in-1 barcode + RFID + MSR + card reader module

Optional Accessories


Part Number	Description
UTK-500F-A0E	Floor stand with SNBC BTP-U81 thermal printer (for China only)
UTK-500S-A0E	Floor stand without thermal printer
UTK-500G-A0E	Floor stand with thermal printer bracket
UTC-520-STAND1E	Desktop stand for UTC-500 series
UTC-H01-STANDE	H-shaped floor stand
UTC-S01-STAND	Desk stand (100 x 100/75 x 75)
UTC-T01-STANDE	Triangular floor stand
UTC-WALL-MOUNT1E	Wall mount kit for UTC-500 series
UTC-WALL-MOUNT3E	Wall mount kit for UTC-500 series

I/O Layout

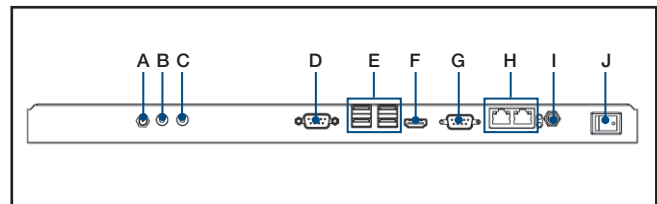

- A. Antenna port
- B. Line-out
- C. Mic-in
- D. COM2
- E. COM1
- F. HDMI
- G. COM1
- H. 2 x LAN
- I. DC-in
- J. Power switch

Side groove for integrating peripherals

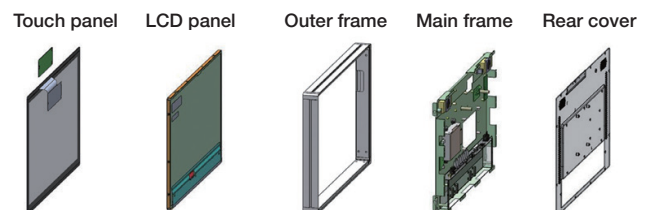

UTC-520

21.5" Ubiquitous Touch Computer UTC-520A with AMD® G-Series T40E UTC-520C with Intel Core™ i7



Features

- Low Power and Fanless Design
- Built-in AMD® G-Series T40E (UTC-520A)
- Built-in Intel Core™ i7 (UTC-520C)
- Providing Natural Viewing Experience with 16:9 21.5" Display
- Front panel complies with IP65 protection standard
- All in one aluminum extrusion design
- Landscape & Portrait screen mode support by different applications
- VESA 100 mm standard mounting holes for varied mounting demands
- Attachable design for panel & peripherals to extend function and applications




Introduction

UTC-520 features an all-in-one computing system equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. The systems deliver updated information with well-designed interactive interfaces, fully ensure relevant content and targeted promotions are delivered. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Specifications

Processor System	CPU	AMD® G-Series T40E Dual-core 1.0 GHz (UTC-520A)	Intel Core™ i7 3517UE 1.7 GHz (UTC-520C)
	Chipset	T40E + A50M	Intel QM77
	L2 Cache	512 KB	1 MB (L3, 4MB)
	Memory	1 x SO-DIMM DDR3 1066 MHz up to 4 GB	1 x SO-DIMM DDR3/DDR3L 1333/1600 MHz up to 8 GB
	SSD	Support 1 x CFast	
	HDD	1 x 2.5 internal SATA HDD bay	
	Network (LAN)	2 x Gigabit Ethernet ports	
	I/O Ports	3 x RS-232 COM (RS-422/485)*	2 x RS-232 COM (RS-422/485)*
		4 x USB 2.0 2 x Gigabit Ethernet (RJ-45) 1 x VGA & HDMI Audio Line-out x 1, Mic-in x 1	2 x USB 2.0, 2 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x VGA & HDMI Audio Line-out x 1, Mic-in x 1
	Stereo Speaker	3 W x 2	
Bus expansion	Full-size MiniPCIe/mSATA		
Dimensions (W x H x D)	517.64 x 313.51 x 43.50 (mm) (20.38" x 12.34" x 1.71")		
Weight	8 kg (17.6 lb)		
OS Support	Windows XP/ XPE/ Embedded Windows 7/Embedded Windows 8	Embedded Windows 7 /Embedded Windows 8/ Window 10 IoT Enterprise	
Environmental Specifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F)	
	Relative Humidity	10 ~ 95% @ 40° C non-condensing	
	Vibration	0.5G	
	Shock	5G peak acceleration (11 msec. duration)	
	Certification	CE, FCC, UL, CB, CCC, BSMI	
Front Panel Protection	IP65/ NEMA4 Compliant		
Power	Input Rating	12 V/5 A (60 W ITE Adapter)	12 V/7 A (84 W ITE Adapter)
	Power consumption	Typical 32W Max. 40W	Typical 45W Max. 65W
LCD Display	Size/Type	21.5" TFT LCD with LED backlight	
	Max. Resolution	1920 x 1080	
	Max. Color	16.7 M	
	Pixel Pitch (mm)	248.25 (H) x 248.25 (V)	
	Brightness (cd/m²)	250 (Optional 400)	
View Angle	178°/178°		
Touch Screen Option (PE/RE/GE)	Type	Projected Capacitive. Analog Resistive 5-wires / Glass Panel	
	Light Transmission	90% ± 2% / 80%± 5% / 90%	
	Controller	USB Interface / USB Interface / -	


Dimensions

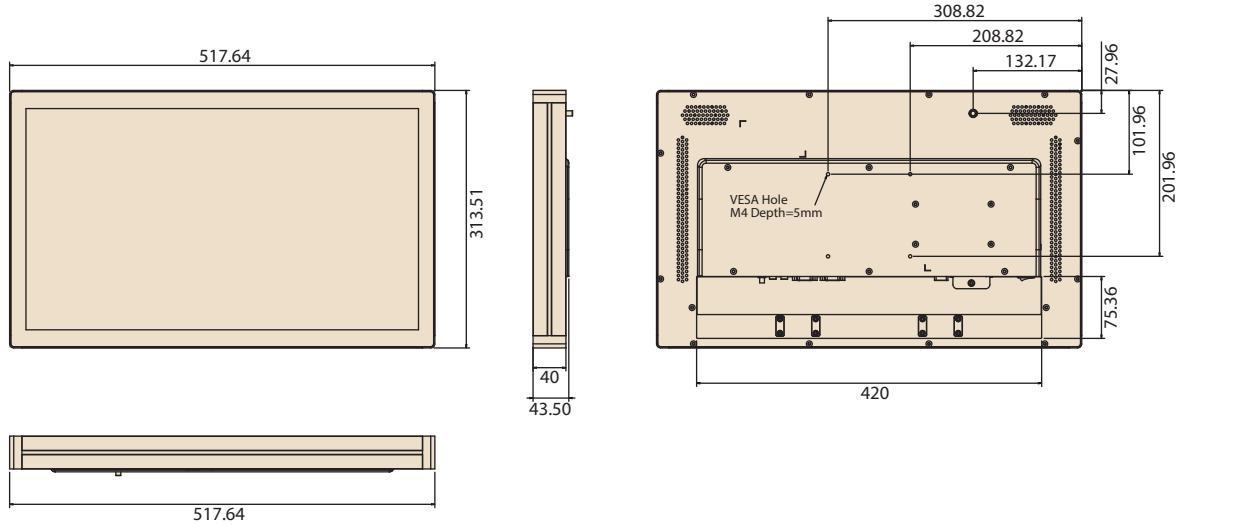

Ordering Information


Part No.	Description
UTC-520A-RE	21.5" AMD T40E Based fanless UTC with Resi.T/S. 4 GB RAM
UTC-520A-PE	21.5" AMD T40E Based fanless UTC with PCT.T/S. 4 GB RAM
UTC-520A-GE	21.5" AMD T40E Based fanless UTC with Glass. 4 GB RAM
UTC-520C-RE	21.5" Intel Core i7 Based fanless UTC with Resi.T/S. 4 GB RAM
UTC-520C-PE	21.5" Intel Core i7 Based fanless UTC with PCT.T/S. 4 GB RAM
UTC-520C-GE	21.5" Intel Core i7 Based fanless UTC with Glass. 4 GB RAM
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700000596	Power Cord (China) CCC,10A 250V, 3P 1830mm
1700018704	Power Cord UK BSI 2P 10A 250V 180cm 18AWG
1960069544N001	IO Cover for UTC-520 series

Fully- Integrated I/O

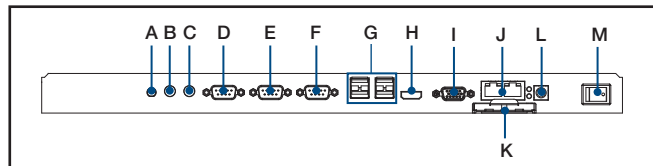

- A. Antenna Port
- B. Line-out
- C. Mic-in
- D. COM3 (UTC-520A/B only)
- E. COM2
- F. COM1
- G. USB 2.0 x 4
(USB 2.0 x 2, USB 3.0 x 2 for UTC-520C)
- H. HDMI
- I. VGA
- J. LAN Ports x 2
- K. CFAST (UTC-520A/B only)
- L. DC Input
- M. Power switch

Side groove design for Flexible peripheral device

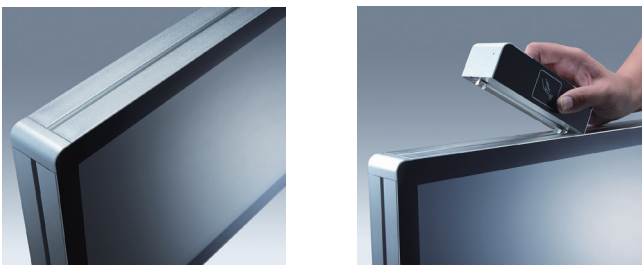

Peripherals for UTC-500 series

Part No.	Description
UTC-P01-A1E	5M Camera Module For UTC-5XX (USB connection)
UTC-P02-A0E	Magnet Strip Reader For UTC-5XX (USB connection)
UTC-P03-A0E	RFID Reader For UTC-5XX (USB connection)
UTC-P06-A0E	Smart Card Reader For UTC-5XX (USB connection)
UTC-P07-A1E	1D/2D Barcode Reader For UTC-5XX (USB Connection)
UTC-P21-A0E	4 in 1 Modules Barcode reader + RFID + Card reader + MSR

Installation Accessory

Part No.	Description
UTK-500F-A0E	Floor stand with SNBC BTP-U81 thermal printer (for China only)
UTK-500S-A0E	Floor stand without thermal printer
UTK-500G-A0E	Floor stand with thermal printer bracket
UTC-520-STAND1E	Desktop stand for UTC-515/520
UTC-H01-STANDE	H-shaped floor stand
UTC-T01-STANDE	Triangle shape floor stand
UTC-WALL-MOUNT1E	Wall Mount kit for UTC-515/520
UTC-WALL-MOUNT3E	Wall Mount kit for UTC-515/520

UTC-520

21.5" Ubiquitous Touch Computer UTC-520D with Intel® Bay Trail J1900



Features

- Low Power and Fanless Design
- Built-in Intel® Bay Trail J1900 (UTC-520D)
- Providing Natural Viewing Experience with 16:9 21.5" Display
- Front panel complies with IP65 protection standard
- All in one aluminum extrusion design
- Landscape & Portrait screen mode support by different applications
- VESA 100 mm standard mounting holes for varied mounting demands
- Attachable design for panel & peripherals to extend function and applications




Introduction

UTC-520 features an all-in-one computing system equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. The systems deliver updated information with well-designed interactive interfaces, fully ensure relevant content and targeted promotions are delivered. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Specifications

Processor System	CPU	Intel® Celeron® J1900 (UTC-520D)	
	Base Frequency	2 GHz (Quad-Core)	
	Cache	L2 Cache 2MB	
	Memory	1 x SO-DIMM DDR3L 1333 MHz up to 8 GB	
	HDD	1 x 2.5 internal SATA HDD bay	
	Network (LAN)	2 x Gigabit Ethernet ports (Supports Wake on LAN)	
	I/O ports	2 x RS-232 COM (RS-422/485)*	
		3 x USB 2.0 / 1 x USB 3.0	
		2 x Gigabit Ethernet (RJ-45)	
		1 x VGA & HDMI	
		Audio Line-out x 1, Mic-in x 1	
	Stereo Speaker	3 W x 2	
	Bus expansion	Full-size MiniPCIe/mSATA	
Mounting	VESA 100 x 100 mm		
Dimensions (W x H x D)	517.64 x 313.51 x 43.50 (mm)		
Weight	8 kg (17.6 lb)		
OS Support	Embedded Windows 7/Embedded Windows 8/ Window 10 IoT Enterprise/Linux Ubuntu 14.04/Android 4.4.2		
Environmental Specifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F)	
	Relative Humidity	10 ~ 95% @ 40° C non-condensing	
	Vibration	0.5G	
	Shock	5G peak acceleration (11 msec. duration)	
	EMC/ Safety	CE, FCC, UL, CB, CCC, BSMI	
	Front Panel Protection	IP65/ NEMA4 Compliant	
Power Supply	Input Rating	12 V/5 A (60 W ITE Adapter)	
	Power consumption	Typical 40W Max. 50W	
LCD Display	Size/Type	21.5" TFT LCD with LED backlight	
	Max.Resolution	1920 x 1080	
	Max. Color	16.7M	
	Pixel Pitch (um)	248.25 (H) x 248.25 (V)	
	Brightness (cd/m ²)	250 (Optional 400)	
	View Angle	178°/178°	
Touch Screen Option (PE/RE/GE)	Type	Projected Capacitive. Analog Resistive 5-wires / Glass Panel	
	Light Transmission	90% ± 2% / 80% ± 5% / 90%	
	Controller	USB Interface / USB Interface / -	

Dimensions

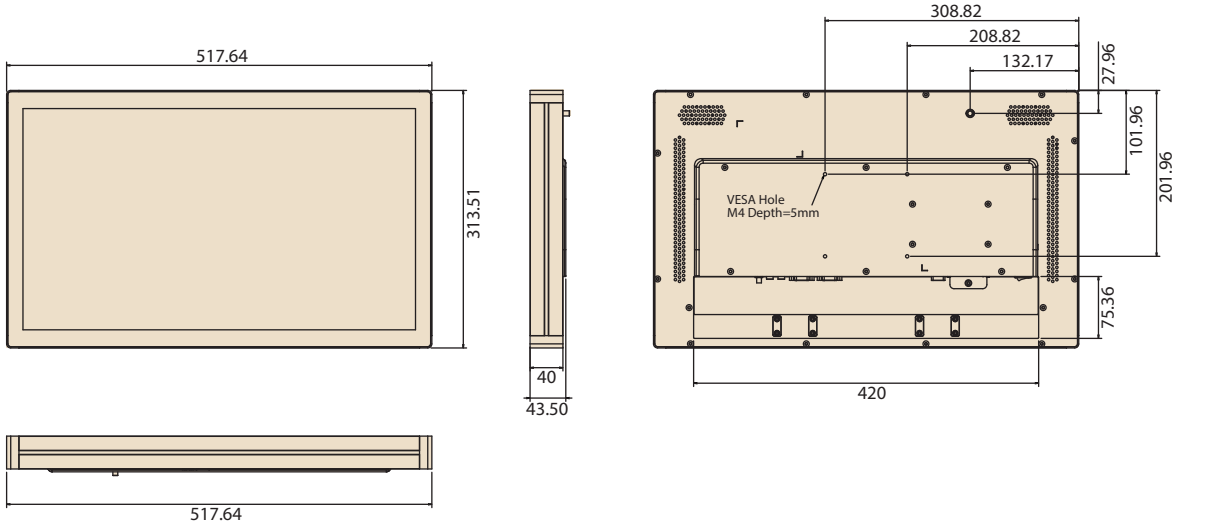

Ordering Information

Part No.	Description
UTC-520D-RE	21.5" Intel® Celeron® J1900 Based fanless UTC with Resi.T/S. 4 GB RAM
UTC-520D-PE	21.5" Intel® Celeron® J1900 Based fanless UTC with PCT.T/S. 4 GB RAM
UTC-520D-GE	21.5" Intel® Celeron® J1900 Based fanless UTC with Glass. 4 GB RAM
UTC-520DP-ATB0E	21.5" PCT.T/S with Intel Cele. J1900, 4GB RAM
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700000596	Power Cord (China) CCC,10A 250V, 3P 1830mm
1700018704	Power Cord UK BSI 2P 10A 250V 180cm 18AWG
1960069544N001	IO Cover for UTC-520 series


Peripherals for UTC-500 series

Part No.	Description
UTC-P01-A1E	5M Camera Module For UTC-5XX (USB connection)
UTC-P02-A0E	Magnet Strip Reader For UTC-5XX (USB connection)
UTC-P03-A0E	RFID Reader For UTC-5XX (USB connection)
UTC-P06-A0E	Smart Card Reader For UTC-5XX (USB connection)
UTC-P07-A1E	1D/2D Barcode Reader For UTC-5XX (USB Connection)
UTC-P21-A0E	4 in 1 Modules Barcode reader + RFID + Card reader + MSR

Side groove design for Flexible peripheral device



Fully- Integrated I/O

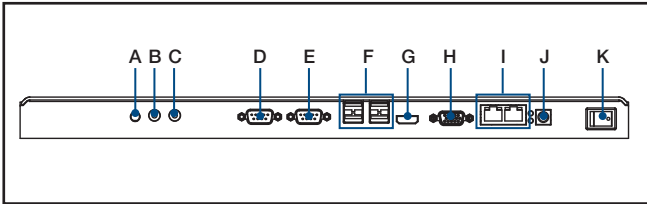

- A. Antenna Port
- B. Line-out
- C. Mic-in
- D. COM2
- E. COM1
- F. USB 3.0 x 2, USB 2.0 x 2
(USB 3.0 x 1, USB 2.0 x 3 for UTC-520D)
- G. HDMI
- H. VGA
- I. LAN Ports x 2
- J. DC Input
- K. Power switch

Installation Accessory

Part No.	Description
UTK-500F-A0E	Floor stand with SNBC BTP-U81 thermal printer (for China only)
UTK-500S-A0E	Floor stand without thermal printer
UTK-500G-A0E	Floor stand with thermal printer bracket
UTC-520-STAND1E	Desktop stand for UTC-515/520
UTC-H01-STANDE	H-shaped floor stand
UTC-T01-STANDE	Triangle shape floor stand
UTC-WALL-MOUNT1E	Wall Mount kit for UTC-515/520
UTC-WALL-MOUNT3E	Wall Mount kit for UTC-515/520

UTC-520

21.5" Ubiquitous Touch Computer UTC-520G with Intel® Pentium® N4200 UTC-520F with Intel® Core™ i5-6300U UTC-520E with Intel® Core™ i5-4300U

NEW



Features

- Low power and fanless system design
- Built-in Intel® Pentium® N4200 (UTC-520G)
- Built-in Intel® Core™ i5-6300U (UTC-520F)
- Built-in Intel® Core™ i5-4300U (UTC-520E)
- 21.5" monitor with 16:9 widescreen display
- IP65-rated front panel for water and dust resistance
- All in one aluminum extrusion design
- Supports both landscape and portrait screen orientations
- VESA 100 mm standard mounting holes for varied mounting demands
- Side groove design for flexible peripheral installation
- White RAL9016 Available



Introduction


UTC-520 features an all-in-one computing system equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. The systems deliver updated information with well-designed interactive interfaces, fully ensure relevant content and targeted promotions are delivered. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Specifications

	Intel® Pentium® N4200 (UTC-520G) Intel® Atom® E3950 (Available)*	Intel® Core™ i5-6300U (UTC-520F)	Intel® Core™ i5-4300U (UTC-520E) Intel® Core™ i3-4010U (Available)* Intel® Celeron® 2980U (Available)*	
Processor System	CPU	Intel® Pentium® N4200 (UTC-520G) Intel® Atom® E3950 (Available)*	Intel® Core™ i5-6300U (UTC-520F)	Intel® Core™ i5-4300U (UTC-520E) Intel® Core™ i3-4010U (Available)* Intel® Celeron® 2980U (Available)*
	Base Frequency	1.1 GHz (N4200/Quad-Core) 1.6 GHz (E3950/Quad-Core)	2.4GHz (Dual-Core)	1.9 GHz (Dual-Core)
	Cache	L2 Cache 2MB	L3 Cache 3MB	L3 Cache 3MB
	Memory	1 x 204 pin SO-DIMM DDR3L 1867 MHz up to 8GB	2 x 204 pin SO DIMM DDR3L 1600MHz up to 16 GB	1 x 204 pin SO-DIMM DDR3L 1333 / 1600 MHz up to 8 GB
	HDD	1 x 2.5 internal SATA HDD bay		1 x 2.5 internal SATA HDD bay
	Network (LAN)	2 x Gigabit Ethernet ports (Supports Wake on LAN)		
	I/O ports	2 x RS-232 COM (RS-422/485)* 2 x USB2.0/ 2 x USB3.0 2 x Gigabit Ethernet (RJ-45) 1 x VGA & 1 x HDMI Audio Line-out x 1, Mic-in x 1		2 x RS-232 COM (RS-422/485)* 2 x USB 2.0 / 2 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x VGA & HDMI Audio Line-out x 1, Mic-in x 1
		Stereo Speaker	3 W x 2	
	Bus expansion	Full-size MiniPCIe / M.2	Full-size MiniPCIe / mSATA	
	Mounting	VESA 100 x 100 mm		
Dimensions (W x H x D)	517.64 x 313.51 x 43.50 (mm)			
Weight	8 kg (17.6 lb)			
OS Support	Win 10 IoT Enterprise Android 6.0 Linux Ubuntu 17.04	WES 7P 32bit WES 7E 32bit Windows Pro Embedded 7 SP1 64bit WES 8 64bit Windows Embedded 8.1 Industry Pro 64bit Win 10 IoT Enterprise Linux Ubuntu 16.04	WES 7P 32bit WES 7E 32bit Windows Pro Embedded 7 SP1 64bit WES 8 64bit Windows Embedded 8.1 Industry Pro 64bit Win 10 IoT Enterprise Linux Ubuntu 16.04	
Environmental Specifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F)		
	Relative Humidity	10 ~ 95% @ 40° C non-condensing		
	Vibration	0.5G		
	Shock	5G peak acceleration (11 msec. duration)		
	EMC/ Safety	CE (RED Compliance), FCC, UL, CB, CCC, BSMI	CE (RED Compliance), FCC, CB, UL, CCC, BSMI	CE (No RED certification), FCC, CB, UL, CCC, BSMI
Front Panel Protection	IP65/ NEMA4 Compliant			
Power Supply	Input Rating	12 V/5 A (60 W ITE Adapter)	12 V/7 A (84 W ITE Adapter)	
	Power consumption	Typical 40W Max. 50W	Typical 45W Max. 65W	
LCD Display	Size/Type	21.5" TFT LCD with LED backlight		
	Max. Resolution	1920 x 1080		
	Max. Color	16.7M		
	Pixel Pitch (um)	248.25 (H) x 248.25 (V)		
	Brightness (cd/m²)	250 (Optional 400)		
View Angle	178°/178°			
Touch Screen Option (PE/RE/GE)	Type	Projected Capacitive. Analog Resistive 5-wires / Glass Panel		
	Light Transmission	90% ± 2% / 80% ± 5% / 90%		
	Controller	USB Interface / USB Interface / -		

Dimensions


Unit: mm

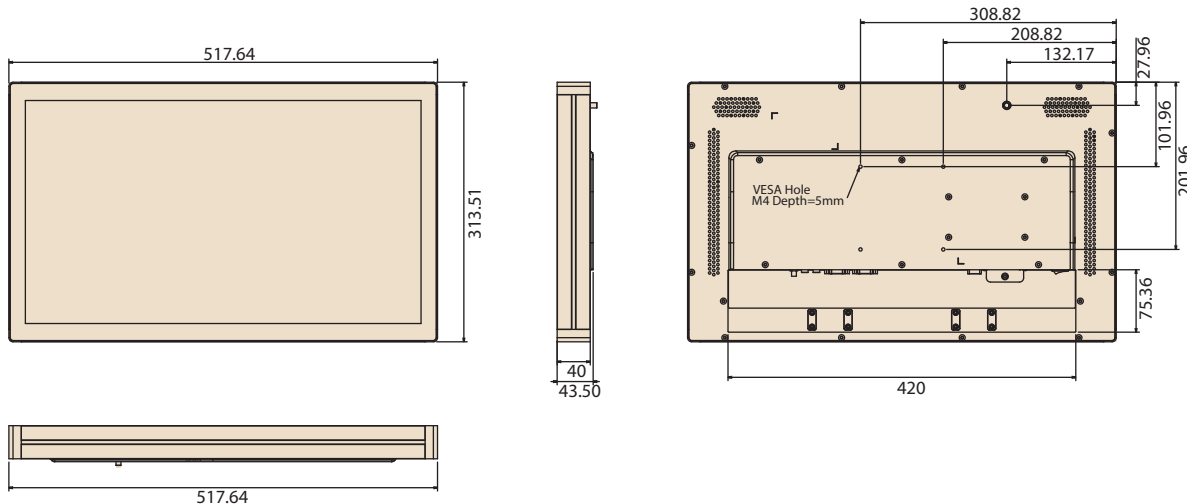

Ordering Information

Part No.	Description
UTC-520GP-ATBOE	21.5" Intel® Pentium® N4200 Based fanless UTC with PCT.T/S. 4 GB RAM
UTC-520GP-ATW0E	21.5" PCT.T/S w Pentium N4200, 4GB RAM,RAL 9016
UTC-520GR-ATBOE	21.5" Intel® Pentium® N4200 Based fanless UTC with Resi.T/S. 4 GB RAM
UTC-520GG-ATBOE	21.5" Intel® Pentium® N4200 Based fanless UTC with Glass. 4 GB RAM
UTC-520FR-ATBOE	21.5" Intel® Core™ i5-6300U Based fanless UTC with Resi.T/S. 4 GB RAM
UTC-520F-PE	21.5" Intel® Core™ i5-6300U Based fanless UTC with PCT.T/S. 4 GB RAM
UTC-520E-RE	21.5" Intel® Core™ i5-4300U Based fanless UTC with Resi.T/S. 4 GB RAM
UTC-520E-PE	21.5" Intel® Core™ i5-4300U Based fanless UTC with PCT.T/S. 4 GB RAM
UTC-520E-GE	21.5" Intel® Core™ i5-4300U Based fanless UTC with Glass. 4 GB RAM
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700000596	Power Cord (China) CCC,10A 250V, 3P 1830mm
1700018704	Power Cord UK BSI 2P 10A 250V 180cm 18AWG
1960069544N001	IO Cover for UTC-520 series

Fully- Integrated I/O

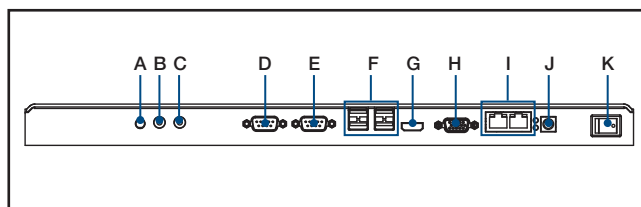

- A. Antenna Port
- B. Line-out
- C. Mic-in
- D. COM2
- E. COM1
- F. USB 3.0 x 2, USB 2.0 x 2
(USB 3.0 x 1, USB 2.0 x 3 for UTC-520D)
- G. HDMI
- H. VGA
- I. LAN Ports x 2
- J. DC Input
- K. Power switch

Side groove design for Flexible peripheral device



Peripherals for UTC-500 series

Part No.	Description
UTC-P01-A1E	5M Camera Module For UTC-5XX (USB connection)
UTC-P02-A0E	Magnet Strip Reader For UTC-5XX (USB connection)
UTC-P03-A0E	RFID Reader For UTC-5XX (USB connection)
UTC-P06-A0E	Smart Card Reader For UTC-5XX (USB connection)
UTC-P07-A4E	2D Barcode Module (Honeywell) for UTC-500 Series (USB connection)
UTC-P09-A0E	Fingerprint reader for UTC-5xx (USB connection)
UTC-P21-A0E	4 in 1 Modules Barcode reader + RFID + Card reader + MSR

Installation Accessory

Part No.	Description
UTK-500F-A0E	Floor stand with SNBC BTP-U81 thermal printer (for China only)
UTK-500S-A0E	Floor stand without thermal printer
UTK-500G-A0E	Floor stand with thermal printer bracket
UTC-520-STAND1E	Desktop stand for UTC-515/520
UTC-H01-STANDE	H-shaped floor stand
UTC-S01-STAND	Desk Stand for 100 X 100 / 75 X 75 mm
UTC-T01-STANDE	Triangle shape floor stand
UTC-WALL-MOUNT1E	Wall Mount kit for UTC-515/520
UTC-WALL-MOUNT3E	Wall Mount kit for UTC-515/520