



WPC 921







System		Display	
- CPU	Intel® 7th & 6th Gen Core™ i processor (LGA1151) i7-6700TE/i5-6500TE/Pentium 4400TE	- Display type	21,5" TFT-LCD
- Chipset	Intel Q170	- Max. resolution	1920 x 1080
- Memory type	Dual Channel DDR4 2133MHz SDRAM MAX 32GB	- Max. color	16,7 M
- Ethernet	GbE LAN1: Intel i219LM; LAN2: Intel i211AT	- Luminance (cd/m2)	300
		- View angle (H°/V°)	89 __ 89 (H) 89 __ 89 (V)
		- Contrast	5000 : 1
I/O		Touch Screen	
- Serial ports	1 x RS232, 1 x RS232/422/485	- Type	Project capacitive
- USB ports	4 USB 3.0 + 2 USB 2.0 (optional)	- Interface	USB
- Audio	3 (Mic-in, Line-out, Line-in)	- Light transmission	Project capacitive: 90%
- Video input	1 VGA - 1 HDMI - 1 DP		
- Ethernet	2 x RJ45		
- Power connection	1 x 4 pin DC terminal block 1 x 2 pin remote power switch 2 x LED light for power and HDD indication		
Storage Space		Mechanical	
- HDD	2 x 2,5" SATA3 (Support RAID 0,1) easily accessible design	- Construction	Aluminum front bezel optional INOX 316
- Mini-PCIe	1 x mSATA slot (full-size)	- IP Rating	Front bezel IP66
- M2	B key for SSD and 3G supported (type: 2242 ,2280mm)	- Mounting	Panel mounting
		- Dimension (mm)	564 x 348 x 121
		- Net weight	-
Expansion Slot		Supported Operating System	
-Mini-PCIe	1, F/S Mini-PCIe slot (with mSATA supported)	- Windows 7 Professional (32/64bit)	
-PCIe	2 PCIe 8X or 3 PCI (optional)	- Windows 7 Ultimate (32/64bit)	
		- Windows 7 Embedded (32/64bit)	
		- Windows 10 IoT Enterprise (32/64bit)	
		- Linux	
Environment		Technical Features	
Operating temperature	0 __ 50 °C	- It can support two different TFT with full HD or HD resolution	
Storage temperature	-30 __ 70 °C		
Storage humidity	10 to 90% @ 40 °C - non condensing		
Certification	CE		

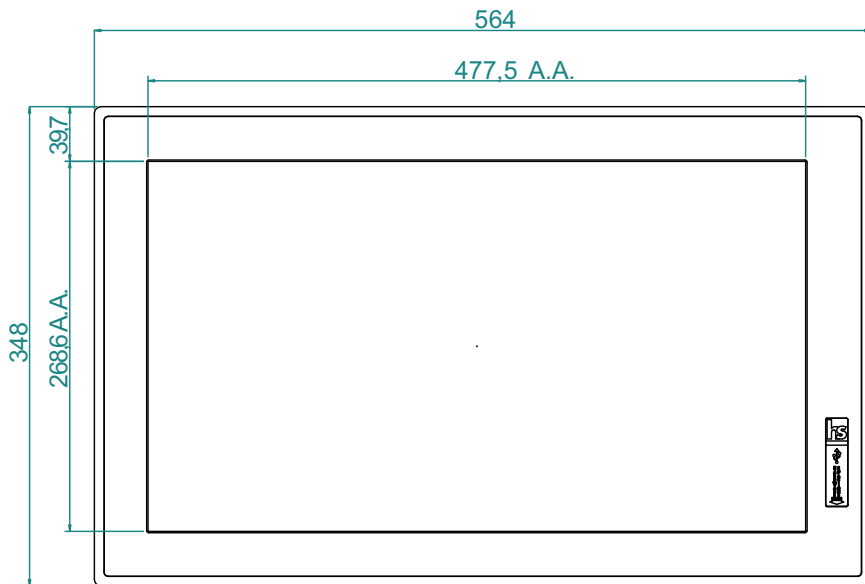

Legenda

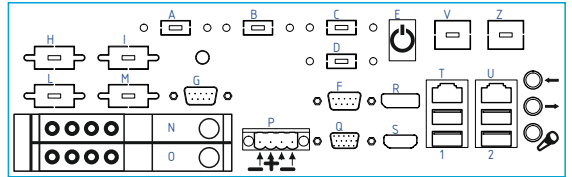

- A/B/C/D: USB 2.0 (opt) P: DC INPUT 12-24 V
- E: POWER BUTTON Q: VGA
- F: COM 1 R: DP1++
- G: COM 2 S: HDMI
- H: COM 3 (opt) T: ETH 1
- I: COM 4 (opt) U: ETH 2
- L: COM 5 (opt) V: ETH 3
- M: COM 6 (opt) Z: ETH 4
- N: HD 1 1: USB 3.0 1-2
- O: HD 2 2: USB 3.0 3-4

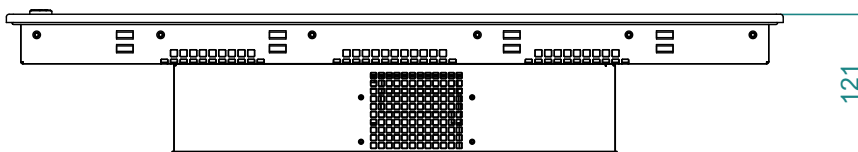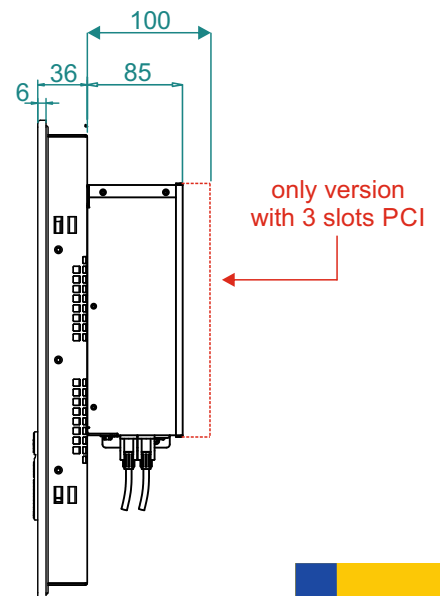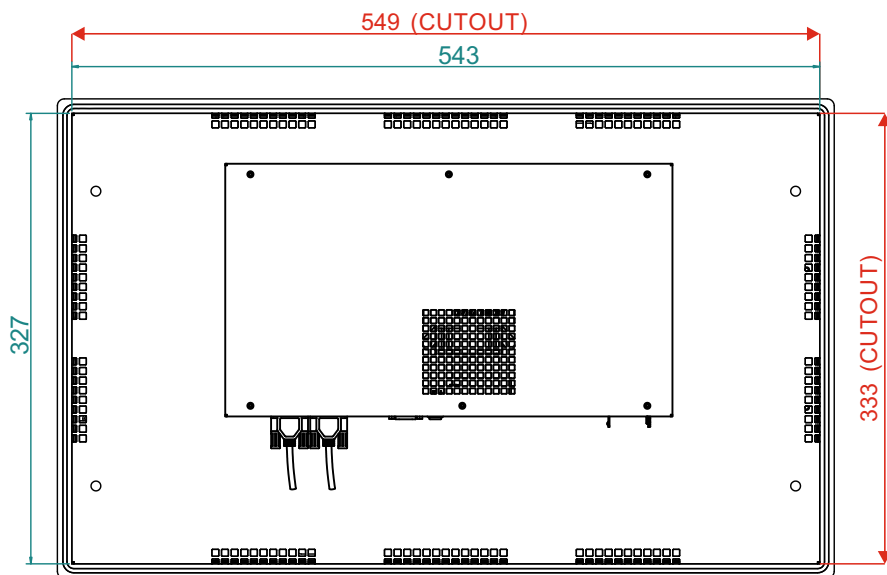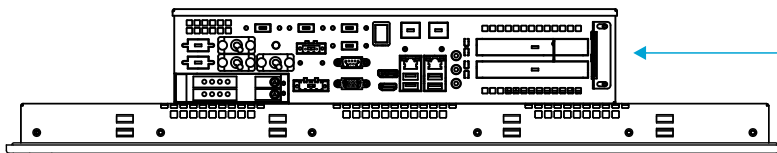

unit: mm